

Type 4X Stainless Steel Wallmount Enclosure Waterfall

potential for controls mounting.

Series Sloped Top with Quarter Turns











CE





NSF - ANSI 169Complies with

complete package.

- NEMA 3R, 4, 4X, 12 and 13
- IEC 60529, IP 66

UL 508 Type 3R, 4, 4X and 12CSA Type 3R, 4, 4X and 12

Construction

Application

Standards

- Formed 304 or 316L stainless steel.
- Top sloped 25°
- Continuously welded seams ground smooth.
- Door stiffeners are provided where required for increased strength and rigidity designed to also permit additional mounting options.

Designed to enclose electrical and/or electronic equipment and protect against harsh, industrial environments for wallmount applications.
Sloped top prevents water from resting on top as well as providing

Unique hinge design allows for easy cleaning in hose-down environments.A wide range of sizes and practical accessories make this product line a

- Formed lip on enclosure to exclude flowing liquids and contaminants.
- Door latches (316 stainless steel quarter turns) feature the added safety of quarter turn slot requiring use of tool for opening.
- Door hinges (316 stainless steel) are easy to clean, provide 180 degree opening, are easily removed for modifications and are interchangeable.
- Seamless poured-in place gasket.
- Collar studs provided for mounting inner panel.
- Includes hardware kit with panel mounting nuts and sealing washers for wall mounting holes.
- Bonding stud provided on door and grounding stud installed in enclosure.

Finish

• Cover and enclosure are natural stainless steel with a smooth brushed finish.

Accessories

- Cooling Products
- Ventilation


- Blowers and Fans
- Door Stop Kit


- Filtered Fans
- Handles
- Washdown Quarter Turn Assemblies
- Mounting Foot Kit
- Padlock Adaptor
- Quarter Turn Assemblies
- Type 4 Hardware Kits
- Gland Plates

в

- Floor Stand Kit
- Ground Wire Kits

- Heaters
- Inner Panels
- Quarter Turn Inserts and Keys
- Wallmount Stand-offs
- Rear Hole Plugs
- Temperature Controls
- Mild Steel and Stainless Steel Window Kits
- Deep Hinged Window Kits
- Wash Down Floor Stand Kit

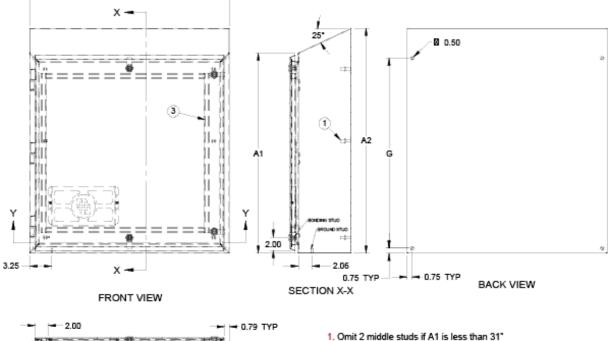



2. Omit 2 middle studs if B is less than 31"

- Omit door stiffener is A1 or B is less than 31" except if A1 x B is 42" or 30"

			Overall Dimensions				Opt. Panel	Galv. Steel	Latch	Hinge
304 S.S. Part No.	316 S.S. Part No.	A1	A2	В	С	G	Part No.	Part No.	Qty	Qty
HWST16128SS	HWST16128S16	16.00	19.70	12.00	8.00	14.50	18P1309	18G1309	2	2
HWST16168SS	HWST16168S16	16.00	19.70	16.00	8.00	14.50	18P1313	18G1313	2	2
HWST20168SS	HWST20168S16	20.00	23.70	16.00	8.00	18.50	18P1713	18G1713	2	2
HWST20208SS	HWST20208S16	20.00	23.70	20.00	8.00	18.50	18P1717	18G1717	2	2
HWST24208SS	HWST24208S16	24.00	27.70	20.00	8.00	22.50	18P2117	18G2117	2	2
HWST24248SS	HWST24248S16	24.00	27.70	24.00	8.00	22.50	18P2121	18G2121	4	2
HWST30248SS	HWST30248S16	30.00	33.70	24.00	8.00	28.50	18P2721	18G2721	4	3
HWST30308SS	HWST30308S16	30.00	33.70	30.00	8.00	28.50	18P2727	18G2727	4	3
HWST36308SS	HWST36308S16	36.00	39.70	30.00	8.00	34.50	18P3327	18G3327	5	3
HWST201612SS	HWST201612S16	20.00	25.50	16.00	12.00	18.50	18P1713	18G1713	2	2
HWST202012SS	HWST202012S16	20.00	25.50	20.00	12.00	18.50	18P1717	18G1717	2	2
HWST242412SS	HWST242412S16	24.00	29.50	24.00	12.00	22.50	18P2121	18G2121	4	2
HWST302412SS	HWST302412S16	30.00	35.50	24.00	12.00	28.50	18P2721	18G2721	4	3
HWST363012SS	HWST363012S16	36.00	41.50	30.00	12.00	34.50	18P3327	18G3327	5	3

		Overall Dimensions				Opt. Panel	Galv. Steel	Latch	Hinge	
304 S.S. Part No.	316 S.S. Part No.	A1	A2	В	С	G	Part No.	Part No.	Qty	Qty
HWST363612SS	HWST363612S16	36.00	41.50	36.00	12.00	34.50	18P3333	18G3333	5	3
HWST363016SS	HWST363016S16	36.00	43.40	30.00	16.00	34.50	18P3327	18G3327	5	3
HWST483616SS	HWST483616S16	48.00	55.40	36.00	16.00	46.50	18P4533	18G4533	5	4
HWST603616SS	HWST603616S16	60.00	67.40	36.00	16.00	58.50	18P5733	18G5733	5	4

Data subject to change without notice

 $\ensuremath{\mathbb{C}}$ 2017. Hammond Manufacturing Ltd. All rights reserved.