

RPE5C1H100J2M1Z03A


" # " indicates a package specification code.

- To be discontinued
- Flow OK
- Complies with RoHS
- AEC-Q200
- Anti-noise
- Deflecting crack
- Soldering crack

Deadline for last orders: 30 Apr 2014

< List of part numbers with package codes >
RPE5C1H100J2M1Z03A

Shape

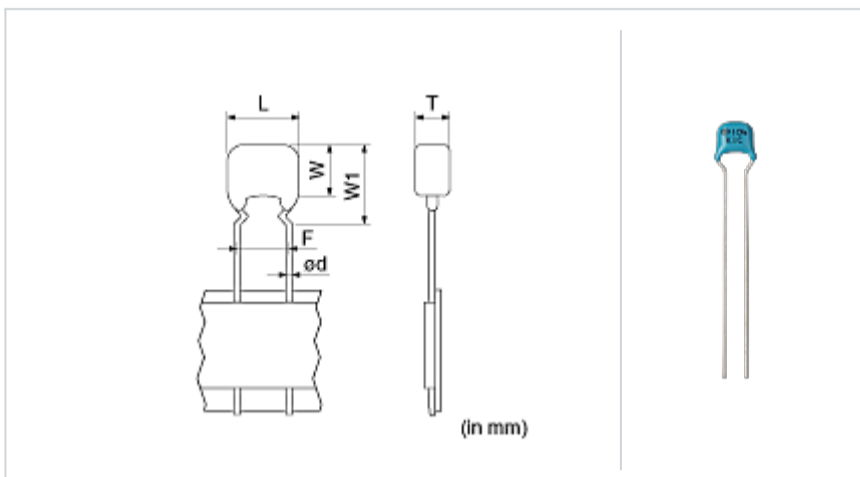

L size or outer diameter D (mm)	5.0 mm max.
W size	3.5 mm max.
T size	2.5 mm max.
Lead spacing F	5 +0.6/-0.2mm
Lead diameter d	0.5 ± 0.05mm
W1 size (max.)	5.0mm

References

Packaging	Specifications	Minimum quantity
	Ammo pack taping type	2000

Specifications

Capacitance	10pF ± 5%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	C0G(EIA)
Temperature coefficient	0 ± 30ppm/
Temperature range of temperature characteristics	25 to 125
Operating temperature range	-55 to 125

⚠ Attention

- This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.