

## Surge protection base element - PT PE/S+1X2-BE - 2856265

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Base element for protective plug PT with surge voltage device protection for the power supply unit and one 2-wire floating signal circuit, mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

### Why buy this product

- Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Impedance-neutral disconnection of plug for test and maintenance purposes

### Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 819675
GTIN	4017918819675

### Technical data

#### Dimensions

Height	90 mm
Width	17.7 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module height	90 mm
Complete module width	17.7 mm
Complete module depth	65.5 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

#### General

Flammability rating according to UL 94	V-0
--	-----

# Surge protection base element - PT PE/S+1X2-BE - 2856265

## Technical data

### General

Color	black
Mounting type	DIN rail: 35 mm
Type	DIN rail module, two-section, divisible
Number of positions	2

### Protective circuit, power supply

Surge protection fault message	none
--------------------------------	------

### Connection (protective circuit, power supply)

Connection method	Screw connection
Connection method IN	Screw terminal blocks
Connection method OUT	Screw terminal blocks
Screw thread	M3
Stripping length	8 mm

### Protective circuit, information technology

Surge protection fault message	none
--------------------------------	------

### Power supply, general


Connection method	Screw connection
Connection method IN	Screw terminal blocks
Connection method OUT	Screw terminal blocks
Screw thread	M3
Stripping length	8 mm

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Dimensional drawing

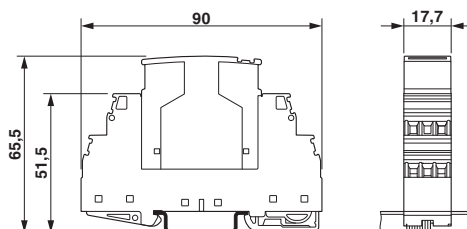

The figure shows the complete module consisting of a base element and connector

## Surge protection base element - PT PE/S+1X2-BE - 2856265

### Approvals

Approvals

---

Approvals


EAC / EAC

---

Ex Approvals

---

### Approval details

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

EAC		EAC-Zulassung
-----	--	---------------

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>